



JOTUN

JOTAFLOOR JOTUN EPOXY FILLER

Product Information

Key features & benefits

- Covers up surface imperfections, cracks and undulations
- Can be applied in thick coats
- No shrinkage after filling
- Provides a tough, scratch proof surface after curing
- Solvent-free - Applicator / Painter friendly



Area of use

- On vertical Concrete
- Concrete Floors




Typical system

Surface preparation:

Grinding or captive blasting

- 1 Optional: Sealer 1 x 40 μm DFT
- 2 Jotun Epoxy Filler: up to 10000 μm DFT

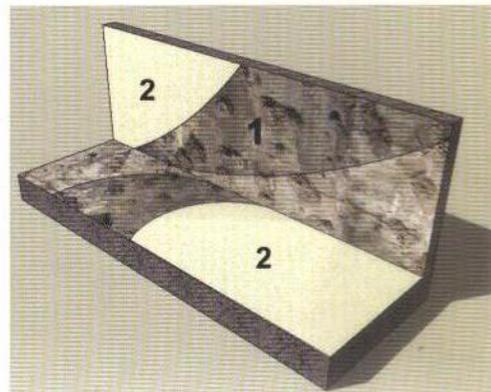

Product description

Jotun Epoxy Filler is a high strength, non-shrink, two component, solvent-free epoxy filler. Once cured, the abrasion resistance and comprehensive strength are higher than concrete.

Recommended use

Designed to fill cracks, blow holes, spalls and other surface imperfections in concrete substrates.

Surface preparation

Concrete should be minimum 28 days old to allow for curing. Prior to the application of any coating the maximum moisture content allowed is 4 %. All surfaces should be clean, dry and free from contamination. The surface should be assessed and treated in accordance to ISO 8504.

Contact your local Jotun office for more information.

Application methods

Trowel Putty Knife Spatula

Application data

Mixing Ratio (volume)	1,5:1
Mixing	1,5 parts Jotun Epoxy Filler Comp. A (base) to be mixed thoroughly with 1 part Jotun Epoxy Filler, Comp. B (curing agent) until a uniform colour and consistency is obtained
Pot life (23°C)	1 hour (Reduced at higher temp.)
Cleaner	Jotun Thinner No. 17

Disclaimer

The information in this product sheet is based on laboratory testing and practical experience. However, as the product is often used under conditions beyond our control, we cannot guarantee anything but the quality of the product itself. We reserve the right to change the given data without notice.