



JOTUN

JOTAFLOOR SEALER

Product Information

Key features & benefits

- Provides an effective sealing of the concrete surface
- Good adhesion to the concrete surface
- Water resistant
- Good chemical resistance
- Ensures good adhesion between concrete and Jotafloor products



Area of use

- Warehouses
- Service areas
- Technical rooms

Sealer for subsequent Jotafloor products



Typical system

As a dustbinder

- 1 New Concrete Surface
- 2 Surface preparation: Grinding or captive blasting
- 3 Jotafloor Sealer: 1 x 50 μm DFT


As part of a paint system

- 2 Surface preparation: Grinding or captive blasting
- 3 Jotafloor Sealer: 1 x 40 μm DFT

Followed by

Jotun Epoxy Filler

Jotafloor Topcoat 2 x 50 μm DFT or Jotafloor PU Topcoat 2 x 70 μm DFT

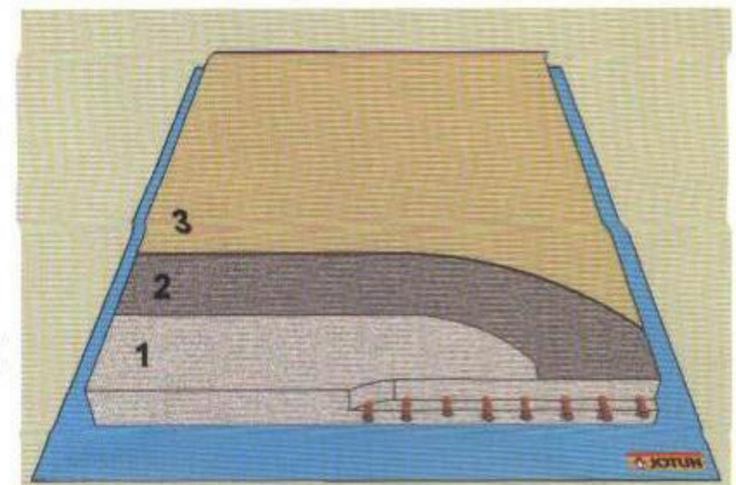



JOTUN

JOTAFLOOR SEALER

Product description

Jotafloor Sealer is a transparent two-pack epoxy sealer/primer exhibiting excellent penetration properties to ensure good adhesion between Jotafloor products and concrete surfaces.

Recommended use

As a sealer/primer for subsequent Jotafloor products or for use independently as a dust binder for concrete floors.

Surface preparation

Condition prior to application:

Concrete should be minimum 28 days old to allow for curing. Prior to the application of any coating the maximum moisture content allowed is 4 %. All concrete damaged by exposure to chemicals, contaminated by any substance or unsound in any way, shall be removed to expose sound concrete.

Concrete surface preparation by using dust free captive blasting units, grinding equipment, sand blasting or high pressure water jetting is critical in achieving the right surface profile prior to paint application.

Coated surface:

Recoating of existing floors is following a similar procedure like for a new concrete surface. Surface has to be free of any contamination. Remove any contamination with use of alkaline soap or solvent.

Contact your local Jotun office for more information.

Application methods

Spray Brush Roller

Application data

| | |
|----------------------------|---|
| Mixing Ratio (volume) | 4:1 |
| Mixing | 4 parts Comp. A (base) to be mixed thoroughly with 1 part Jotafloor Sealer, Comp. B (curing agent). NO PART MIXING. |
| Induction time | 30 minutes |
| Pot life (23°C) | 8 hours (Reduced at higher temp.) |
| Thinner/Cleaner | Jotun Thinner No. 17 |
| Guiding data airless spray | |
| Pressure at nozzle | 15 MPa (150 kp/cm ² , 2100 psi) |
| Nozzle tip | 0.46 - 0.58 mm (0.018 - 0.023") |
| Spray angle | 40 - 80° |
| Filter | Check to ensure that filters are clean |

Designed Inhouse Code: 8MMMN38404 - 05102X

Disclaimer

The information in this product sheet is based on laboratory testing and practical experience. However, as the product is often used under conditions beyond our control, we cannot guarantee anything but the quality of the product itself. We reserve the right to change the given data without notice.

