



JOTUN

JOTAFLOOR TOPCOAT

Product Information


Key features & benefits

- Durable hard wearing epoxy coating for concrete floors
- Can be tinted on MCI - instant service
- Good chemical resistance



Area of use

- Warehouses
- Garages
- Workshops
- Production areas

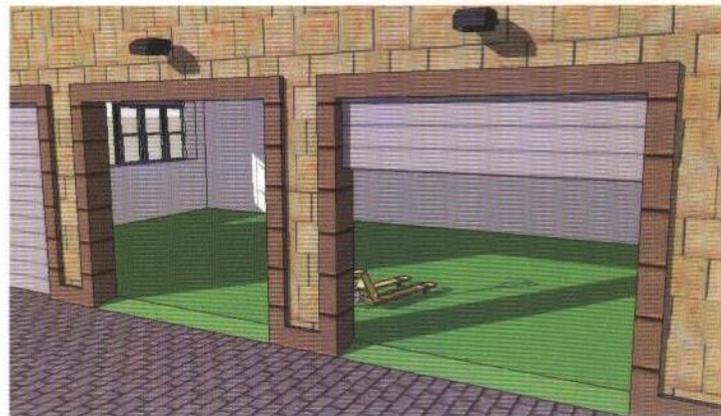


Typical system

New concrete surface

- 1 Surface
- 2 Surface preparation: Grinding or captive blasting
- 3 Jotafloor Sealer: 1 x 40 μm DFT
- 4 Jotun Epoxy Filler
- 5 Jotafloor Topcoat: 2 x 50 μm DFT

Recoating

- Surface preparation: Grinding
- 4 Jotun Epoxy Filler
 - 5 Jotafloor Topcoat: 2 x 50 μm DFT

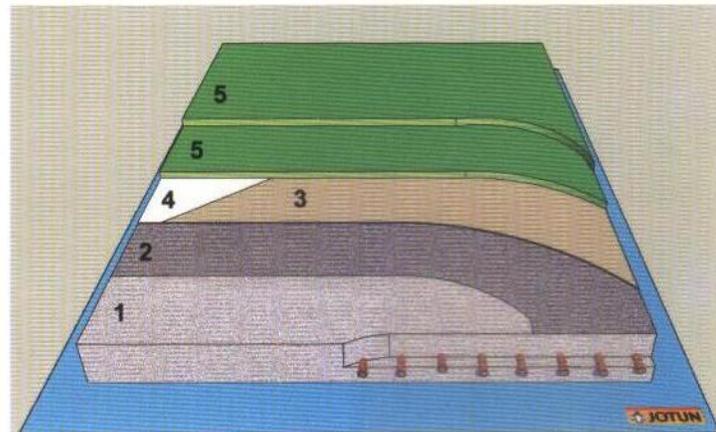



JOTAFLOOR TOPCOAT

Product description

Jotafloor Topcoat is a two-pack epoxy floor coating offering good chemical resistance, durability and is available in a variety of colours.

Recommended use

Areas requiring a dust free, hard wearing and aesthetically pleasing floor coating.

Surface preparation

Condition prior to application:

Concrete should be minimum 28 days old to allow for curing. Prior to the application of any coating the maximum moisture content allowed is 4 %. All concrete damaged by exposure to chemicals, contaminated by any substance or unsound in any way, shall be removed to expose sound concrete.

Concrete surface preparation by using dust free captive blasting units, grinding equipment, sand blasting or high pressure water jetting is critical in achieving the right surface profile prior to paint application.

Coated surface:

Recoating of existing floors is following a similar procedure like for a new concrete surface. Surface has to be free of any contamination. Remove any contamination with use of alkaline soap or solvent.

Contact your local Jotun office for more information.

Application methods

Spray Brush Roller

Application data

Mixing Ratio (volume)	4:1
Mixing	4 parts Comp. A (base) to be mixed thoroughly with 1 part Jotafloor TC, Comp. B (curing agent)
Induction time	30 minutes
Pot life (23°C)	8 hours (Reduced at higher temp.)
Thinner/Cleaner	Jotun Thinner No. 17
Guiding data airless spray	
Pressure at nozzle	15 MPa (150 kp/cm ² , 2100 psi)
Nozzle tip	0.46 - 0.58 mm (0.018 - 0.023")
Spray angle	40 - 80°
Filter	Check to ensure that filters are clean

Disclaimer

The information in this product sheet is based on laboratory testing and practical experience. However, as the product is often used under conditions beyond our control, we cannot guarantee anything but the quality of the product itself. We reserve the right to change the given data without notice.

